

BUKTI KORESPONDENSI

ARTIKEL JURNAL INTERNASIONAL BEREPUTASI

Judul artikel Jurnal Penulis : **Monitoring Solar Heat Intensity of Dual Axis Solar Tracker Control System : New Approach**


Jurnal : Journal Case Studies In Thermal Engineering, Elsevier

Penulis : Izza Anshory, Jamaaluddin, A'rasy Fahrudin , Ahmad Fudholi, Yadi Radiansah, Dalmasius Ganjar Subagio, Yusuf Suryo Utomo, Aep Saepudin, Oo Abdul Rosyid , Kamaruzzaman Sopian

No.	Perihal	Tanggal
1.	Bukti Submit Manuscript Dan Artikel Yang Disubmit	22 Juli 2023
2.	Bukti Konfirmasi Review	26 September 2023
3	Bukti Konfirmasi Artikel Setelah direview	13 Oktober 2023
4	Bukti Konfirmasi Artikel Accepted	18 November 2023
6	Bukti Konfirmasi Continue Submission Process & Article Processing Fee	22 November 2023
7	Bukti Artikel Yang Publish	23 November 2023

Bukti Submit Manuscript Dan Artikel Yang Disubmit

(22 Juli 2023)

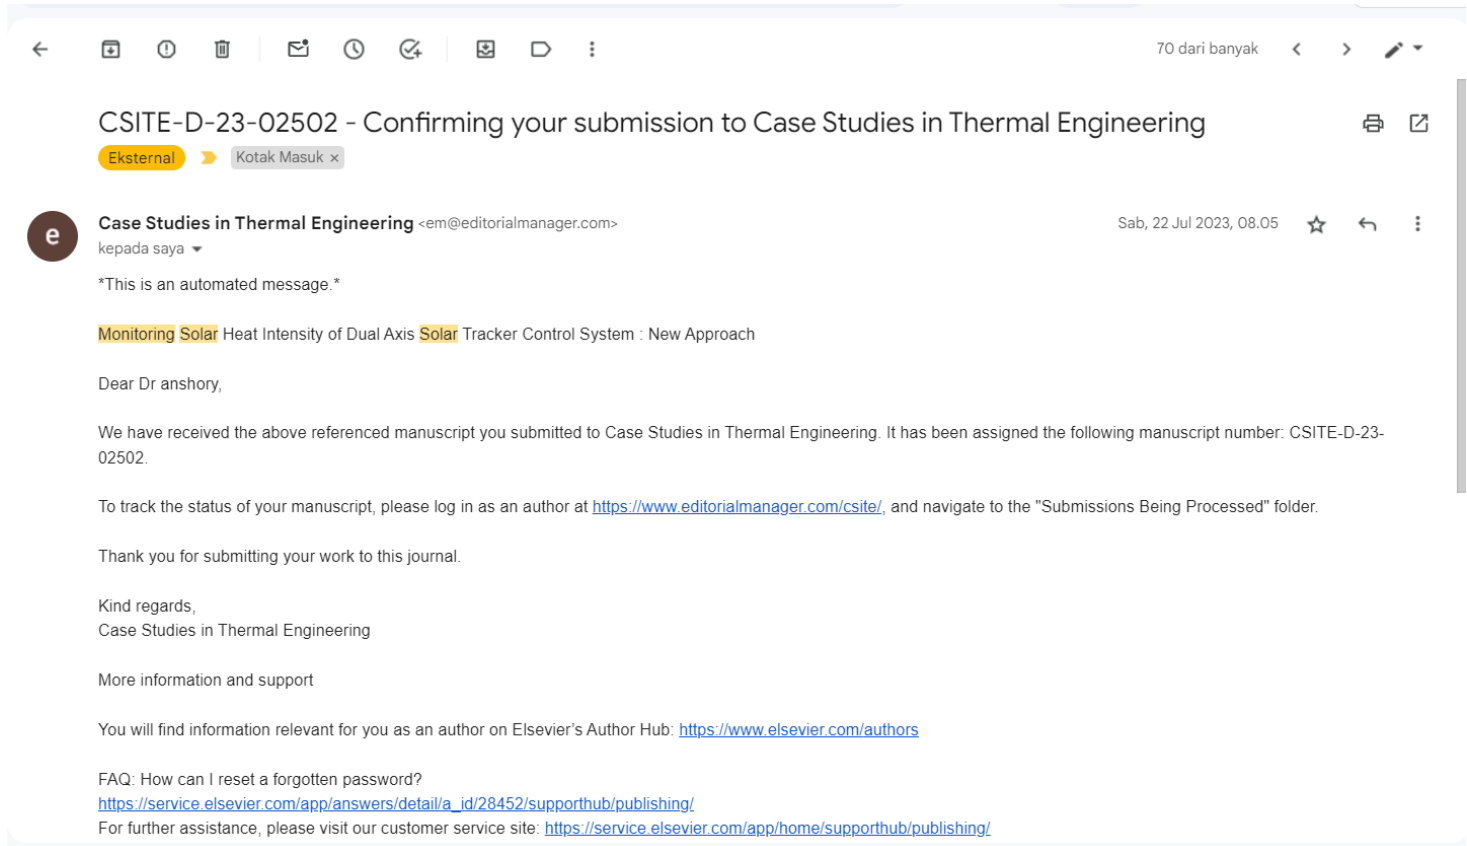

The image shows a screenshot of an email interface. At the top, there is a navigation bar with icons for back, forward, search, and other functions. The email title is "CSITE-D-23-02502 - Confirming your submission to Case Studies in Thermal Engineering". Below the title, there are labels "Eksternal" and "Kotak Masuk". The sender is "Case Studies in Thermal Engineering" with the email address "<em@editorialmanager.com>". The recipient is "kepada saya". The date and time are "Sab, 22 Jul 2023, 08.05". The main body of the email contains the following text:

This is an automated message.

Monitoring Solar Heat Intensity of Dual Axis **Solar** Tracker Control System : New Approach

Dear Dr anshory,

We have received the above referenced manuscript you submitted to Case Studies in Thermal Engineering. It has been assigned the following manuscript number: CSITE-D-23-02502.

To track the status of your manuscript, please log in as an author at <https://www.editorialmanager.com/csite/>, and navigate to the "Submissions Being Processed" folder.

Thank you for submitting your work to this journal.

Kind regards,
Case Studies in Thermal Engineering

More information and support

You will find information relevant for you as an author on Elsevier's Author Hub: <https://www.elsevier.com/authors>

FAQ: How can I reset a forgotten password?
https://service.elsevier.com/app/answers/detail/a_id/28452/supporthub/publishing/

For further assistance, please visit our customer service site: <https://service.elsevier.com/app/home/supporthub/publishing/>

Monitoring Solar Heat Intensity of Dual Axis Solar Tracker Control System : New Approach

Izza Anshory¹, Jamaaluddin Jamaaluddin², A'rasy Fakhruddin³, Ahmad Fudholi^{4,5}, Yadi Radiansah⁵, Dalmasius Ganjar Subagio⁵, Yusuf Suryo Utomo⁵, Aep Saepudin⁵, Oo Abdul Rosyid⁵, Kamaruzzaman Sopian⁶

^{1,2} Departement of Electrical Engineering, Universitas Muhammadiyah Sidoarjo, Indonesia

³ Departement of Mechanical Engineering, Universitas Muhammadiyah Sidoarjo, Indonesia

^{4,6} Solar Energy Research Institute, Universiti Kebangsaan Malaysia, 43600, Bangi, Selangor, Malaysia

⁵ Research Center for Energy Conversion and Conservation, National Research and Innovation Agency (BRIN), Indonesia

*Corresponding author: izzaanshory@umsida.ac.id, Phone: +6281938312740

Abstract

Control of the amount of solar energy successfully absorbed by Photovoltaic system equipment that can follow the movement of sunlight vertically and horizontally at any time is a very urgent need. The method used in this research activity is the utilization of the ESP8266 microcontroller as the primary control of photovoltaic movements that can follow the direction of sunlight based on information from the Light Dependent Resistor (LDR) sensor. The data variables measured and stored include current, voltage, and temperature, which are then processed and transmitted by the ESP 8266 microcontroller to the user through the Internet of Think (IoT) media to the BLINK application. The experimental results show that the proposed system using the ESP8266 microcontroller and LDR sensor increases efficiency, accuracy, speed, and convenience in the monitoring and control system of sunlight intensity by averagely 65%, compared with manual monitoring system.

Keywords: Photovoltaic System; Solar Tracker; Dual-Axis; ESP8266 Microcontroller, LDR Sensor.

1. Introduction

Indonesia as a country in the equatorial region has the potential for renewable energy sources, namely solar energy, which is quite large throughout the year. Geographically, the opportunity for the availability of solar energy received is quite large, which is in the energy range of 4.8 - 6.0 kWh/m². By 2050, it's anticipated that the amount of electricity produced worldwide from RE sources would reach almost 45 trillion kWh. By 2020, 20% of Europe's total final energy consumption is expected to come from renewable sources. By 2040, the Asia Pacific Economic Cooperation (APEC) countries' installed capacity would total 6,235 GW, with 35% of that coming from renewable sources[1]. The large availability of solar energy, its utilization needs to be maximized in everyday life such as solar power plants (PLTS)[2]. The utilization of solar energy for various types of activities in everyday life has several advantages, among others, the energy is available very abundantly, easy maintenance, no noise, able to work automatically, and can be applied on grid and off grid[3]. In addition to having advantages, the utilization of solar energy has obstacles, namely the limited time in the absorption of sunlight at sunrise and sunset and the uncertain intensity of light or solar radiation. Due to these limitations, an innovation is needed to be able to track the movement of sunlight.[4]

Solar tracker is a photovoltaic system consisting of a support structure equipped with a motor[5]. This system is designed to automatically direct the solar panels throughout the day so that they always face the sun and capture maximum sunlight[6]. Therefore, there are several classifications of solar trackers, namely the classification of solar trackers based on the control system used, the driver used, the tracking strategy used or on the basis of the degrees of freedom of the movement exhibited by the system. Solar trackers based on the control system are divided into two, namely the open sun movement tracking system and the closed sun movement tracking system[7]. The open type of solar tracking system is where the control signals provided to the motors are based on the current input data and system algorithms only. The system has no feature to observe and evaluate the output data with respect to the desired output[8]. Whereas a sun tracking system based on closed control means a sun movement tracking system that provides feedback control to detect errors and provide the necessary drive signals by the motor.

Based on the drive system used, sun tracking systems are classified into passive sun tracking systems and active sun tracking systems. A passive tracking system is a system that uses thermal expansion of a low-boiling gas material or liquid that is compressed and pushed to one side or the other as a method to track the movement of sunlight, while an active tracking system is a system that tracks the movement of sunlight by utilizing microprocessor technology, motors, and light sensors to increase the amount of solar energy absorbed[9]. In addition, sun tracking systems are also distinguished by freedom of movement, the first is a single axis tracking system with one degree of freedom in one axis of rotation and the second is a double axis with two degrees of freedom as the axis of rotation[10].

Research on solar trackers has been widely developed including the use of Bluetooth modules as a communication medium between Arduino and android applications to improve the performance of solar trackers that can be monitored via smartphones. The study also compared the power received by solar panels using a 2-axis solar tracker to provide 11.57% greater power output compared to static solar panels[6]. A two-axis tracking system to obtain energy from sunlight using Arduino Uno as the main controller of the system and four light-dependent resistors (LDRs) have been used to detect sunlight and maximum light intensity. Two servo motors have been used to rotate the solar panel according to the sunlight source detected by the LDRs. Furthermore, an ESP8266 WIFI device is used as an intermediary between the device and the IoT monitoring system[11]. The IoT monitoring system is a website that serves to store data. The efficiency of this system has

been tested and compared with a single axial sun tracker. As a result, the two-axis solar tracking system produces more power, voltage and current[12].

A sun tracking system can substantially increase electricity production on photovoltaic (PV) systems, which utilizes feedback control theory along with light-dependent resistor four LDR sensors and microcontroller-based electronic circuits[13]. A dual-axis sun tracking system allows more energy to be generated as the solar array can remain aligned perpendicular to the sun. Comparative results have been presented between static and automated stand-alone dual-axis solar systems which show for integrated grid systems have better performance results. Photovoltaic converts solar energy into electrical energy by absorbing the intensity of sunlight. However, the intensity of sunlight absorbed is always changing in one day, so the intensity of sunlight absorption between morning, afternoon, and evening is not the same. This causes the power output of the photovoltaic to be unstable. However, there is already a device that can overcome this called a solar charge controller[14].

Based on several previous studies, a dual-axis solar tracker system has been carried out to absorb as much energy as possible by utilizing ESP8266 microcontroller technology and LDR sensors. Therefore, this study discusses the control and instrumentation system of the 160 WP dual-axis solar tracker system that utilizes ESP8266 microcontroller technology and LDR sensors.

II. Material and Methods

The block diagram for instrumentation design of dual axis solar tracker control system based on ESP8266 microcontroller and light sensor is shown in Figure 1.

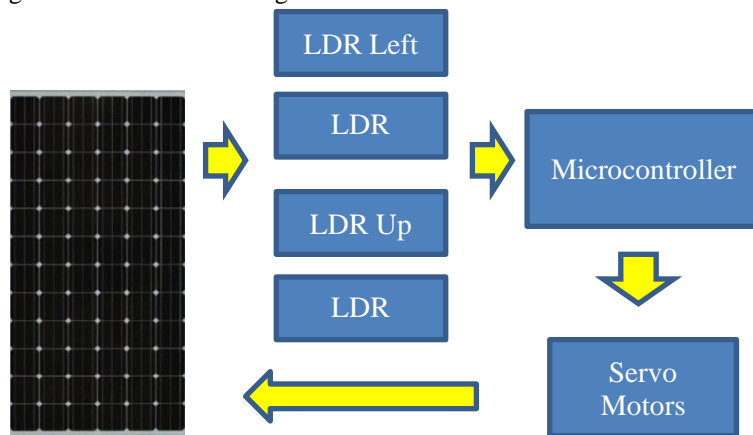


Figure 1. Block Diagram of Dual Axis Solar Tracker Movement Instrumentation System

Figure 1 shows the block diagram of the dual axis solar tracker control system based on the movement of sunlight. In principle, the control system for tracking the movement of sunlight which has two axes, namely the horizontal axis (azimuth) and the vertical axis (elevation). The working process for the dual axis solar tracker system is that the light sensor detects the intensity of the surrounding light and produces a proportional electrical signal, then the signal from the light sensor is sent to the microcontroller[15]. The microcontroller compares the received signal with a certain predetermined reference value or threshold. Based on the comparison, the microcontroller calculates the position changes that need to be made by the solar panel to optimally face the sun. The microcontroller generates output signals that are sent to the motors on the horizontal shaft and vertical shaft of the solar tracker, and then the motors move the shafts so that the solar panels move to follow the sun's movement accurately. This process continues throughout the day, so that the solar panels always face the sun at an optimal angle to maximize the reception of solar energy.

2.1. Servo Motors

A servo motor is a DC motor equipped with a control circuit with a closed feedback system that is integrated with the motor. The position of the rotary axis in the servo will be informed back to the control circuit inside the servo motor. The servo motor is composed of a DC motor, gearbox, variable resistor (VR) or potentiometer and control circuit. The servo motor in this dual axis solar tracker system has the ability to work CW (Clockwise) and CCW (Counterclockwise). CW (Clockwise) is the direction of rotation of the servo motor in the clockwise direction. When the servo motor is activated to rotate CW, the shaft will move clockwise when viewed from the direction of the motor shaft exit. CCW (Counterclockwise) is the direction of rotation of the servo motor counterclockwise. When a servo motor is enabled to rotate CCW, its shaft will move counterclockwise when viewed from the motor shaft exit direction. The ability of a servo motor to rotate both CW and CCW allows for flexible use in various applications. For example, in a dual axis solar tracker, a servo motor on the horizontal shaft can be used to move the solar panel to the left (CW) or to the right (CCW) to follow the sun's movement from east to west throughout the day. The selection of the appropriate rotation direction depends on the specific needs of the application and the system configuration. A servo motor controller such as a microcontroller will provide appropriate control signals to rotate the servo motor in the desired direction (CW or CCW) based on the logic and calculations performed in the sun tracking system.

2.2. NodeMCU ESP 8266

NodeMCU ESP8266 is an IoT-based microcontroller module that can be used as one of the controller components to control the sun tracking system such as figure 2. NodeMCU ESP8266, can connect and control sensors, servo motors, and other devices involved in sun tracking. The NodeMCU ESP8266 provides various input/output (I/O) pins that are used to connect and control these devices. The NodeMCU gives commands to the INA219 sensor, where the INA219 sensor is useful for reading the voltage and current values generated by the solar panel. The INA219 sensor reading uses an I2C communication

line with a high level of precision. Furthermore, the measurement results and data collection are sent via IoT to the Blynk application.

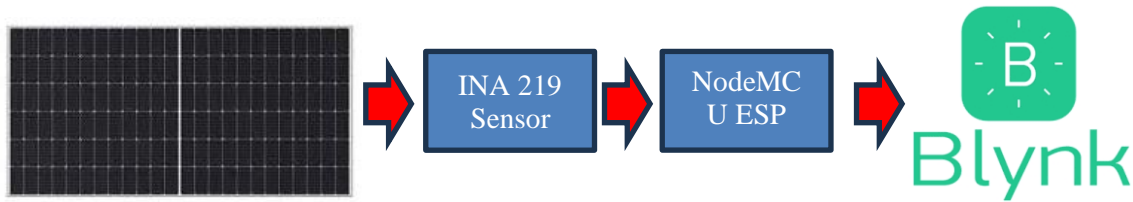


Figure 2. NodeMCU ESP 8266 System with Solar Panel

Sensor Data Acquisition: ESP8266 connected to various sensors is used to capture data from light sensors, temperature sensors, or position sensors. ESP8266 to transmit to an external data source as a monitoring tool or for further analysis. Based on the sensor data and calculation of the required angle, the ESP8266 generates the proper control signals to drive the servo motor to the desired position.

III. Result and Analysis

This section presents the results of design, measurement and analysis of an instrumentation system that uses NodeMCU ESP8266 to measure voltage, current and power in solar panel installations. These results include analysis of measurement accuracy, system stability, and responsiveness to changes in voltage, current, and power values. In addition, the advantages generated by the use of ESP8266 in this system will also be discussed, as well as the possibility of further development to improve the efficiency and reliability of the instrumentation system for measuring voltage, current, and power in solar panel installations as shown in Figure 3.

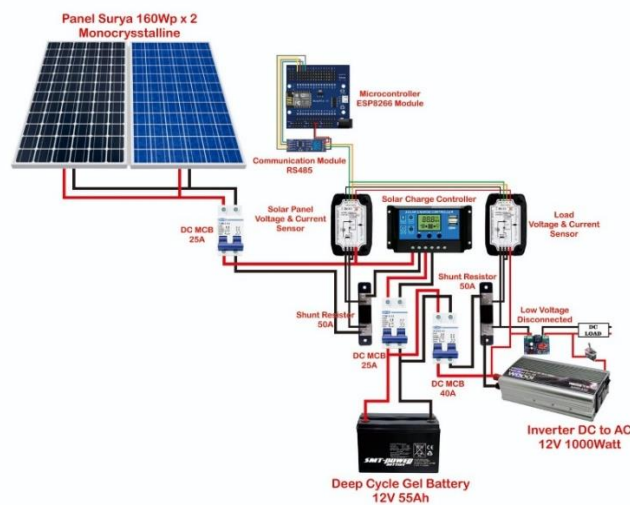


Figure 3. Dual Axis Solar Tracker Instrumentation System Design with LDR and ESP 8266

The resulting of hardware dual axis solar tracker for testing is shown in Figure 4.



Figure 4. Hardware Solar Tracker Dual Axis

These measurements include various important parameters such as voltage, current, power, energy and temperature. Careful analysis of the data over a limited period of time reveals the performance of the solar panels and their potential efficiency in generating electrical energy from sunlight. And the test results for 10 trials are shown in Figure 5.

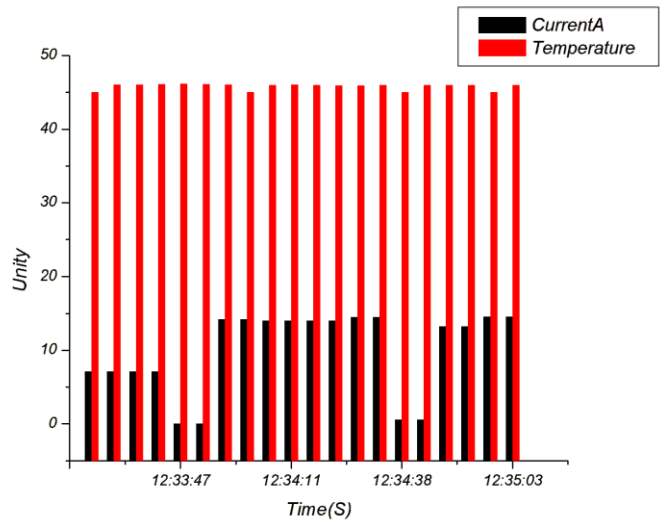


Figure 5. Graphic of Solar Panels Instrumentation

Figure 5 shows that the current measurement on the dual axis solar tracker shows the amount of electron-electron flow in the solar panel electrical circuit. This current data gives an idea of how efficient the solar panel is in converting solar energy into electrical energy. Current analysis is important to assess the performance of solar panels, because the greater the current generated, the more electrical energy the system can produce. The voltage measured on the dual axis solar tracker reflects the electrical potential generated by the solar panels. Voltage analysis shows the stability and power capacity that can be generated by the system. A voltage that is stable and within the expected specifications is a sign of a system that is working well. Temperature measurement on a dual axis solar tracker is an important indicator that affects the efficiency of solar panels. High temperatures can cause a decrease in energy conversion efficiency because the performance of solar panels tends to decrease as the temperature increases.

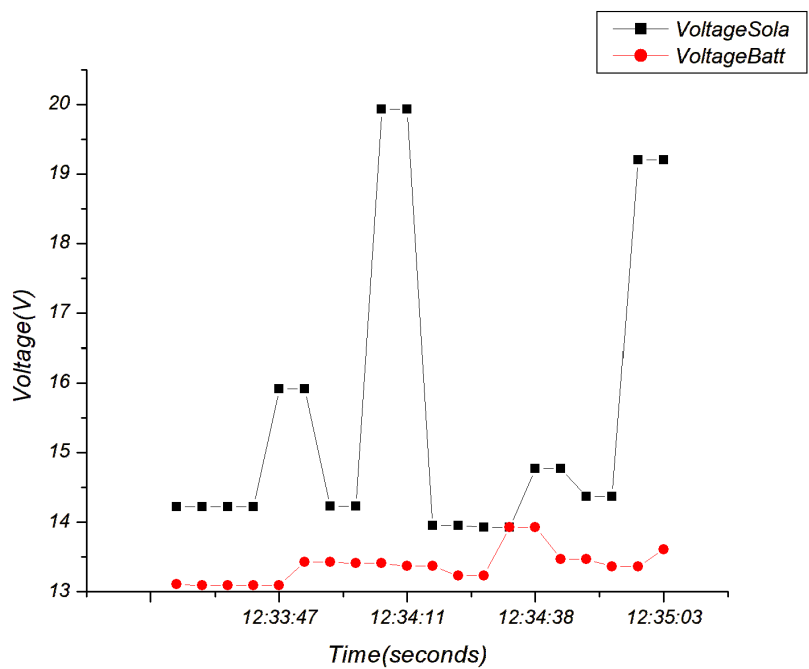


Figure 6. Comparison between Voltage Solar Panels and Battery

The figure 6. shows that the average voltage generated by the photovoltaic is about 15.01 Volts, while the average voltage stored in the Battery is about 13.38 Volts. The voltage difference between the Photovoltaic and Battery is between 0.58 Volts to 6.56 Volts. The voltage difference shows that the transfer of energy from the solar panel to the battery is very efficient. This is indicated by the small difference value.

As for the battery system, the test results are as follows in Figure 6.

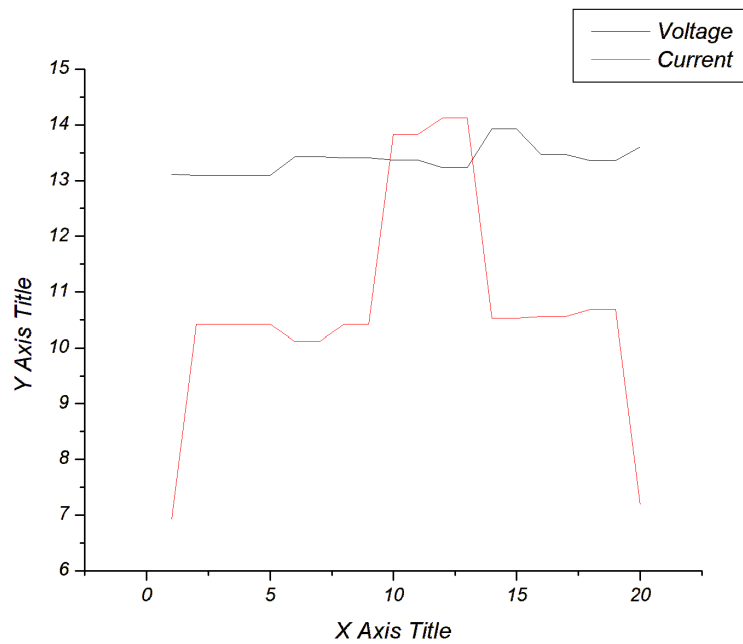


Figure 6. Result of Bateray Instrumentation

Figure 4 shows that current measurements on a battery indicate the amount of electrical charge flowing into or out of the battery during charging or discharging. This current data gives an idea of how well the battery undergoes the charging process and how much power can be generated when the battery is used to supply electricity. Stable current test results that are in line with battery specifications indicate good performance and the ability of the battery to store and release energy efficiently. If the test results show a low or fluctuating voltage outside the normal range, this could indicate a problem with the battery cells or battery management system. A significant voltage drop during battery use could indicate low battery capacity or unfavorable conditions for use.

Result experimental of heat intensity presented in Figure 7.

Time	Temperature (C)
12:33:24	46.06
12:33:29	46.06
12:33:36	46.06
12:33:41	46.13
12:33:47	46.19
12:33:52	46.13
12:33:57	46.06
12:34:01	46.06
12:34:06	46.06
12:34:11	46.06
12:34:16	46.06
12:34:23	45.94
12:34:28	45.94
12:34:33	46.06
12:34:38	46.06
12:34:44	46.06
12:34:49	46.06
12:34:53	46.06
12:34:58	46.06
12:35:03	46.06
12:35:08	46.06
12:35:16	46.06
12:35:21	46.06
12:35:27	46.06
12:35:32	46.06
12:35:37	46.06
12:35:42	46.06

Figure 7. Heat Intensity of Solar Panels

Beside that results Figure 7. show that the performance of the solar tracker in adapting to changes in heat intensity is influenced by affecting the materials, motor performance, and other mechanical drives used in the solar tracker. A good tracking response in hot conditions is key to ensuring that the solar panel remains facing the right direction of sunlight, so as to maximize the energy generated.

IV. Conclusions

The following is the conclusion of the results of designing a dual axis solar tracker with temperature, voltage, current, and power measurements, namely:

1. The designed dual axis solar tracker system has proven to be very effective in optimizing solar energy absorption. With the ability to move the solar panel horizontally and vertically following the movement of the sun, the system is able to significantly increase the solar energy reception compared to fixed solar panels.
2. The measurement of temperature, voltage, current, and power in the solar panel installation through NodeMCU ESP8266 has a sufficient level of accuracy. The data generated is reliable and provides useful information in monitoring and evaluating the performance of solar panel systems.
3. The system is able to respond to changes in temperature, voltage, current, and power in real-time. This allows users to monitor and identify changes in conditions that may affect the efficiency and performance of the solar panel installation.
4. In further development, integration with a remote monitoring system and automatic notification setup to report the condition and performance of the solar panel system in real-time can be done. The use of intelligent algorithms and artificial intelligence can also be applied to improve the efficiency and reliability of solar tracking.

Reference

- [1] A. N. Vargas, G. R. Francisco, M. A. F. Montezuma, L. P. Sampaio, and L. Acho, "Low-cost dual-axis solar tracker with photovoltaic energy processing for education," *Sustainable Energy Technologies and Assessments*, vol. 53, Oct. 2022, doi: 10.1016/j.seta.2022.102542.
- [2] E. V. Platonova, A. S. Toropov, and A. N. Tulikov, "Simulation of energy input to solar panels," *Proceedings - 2019 International Ural Conference on Electrical Power Engineering, UralCon 2019*, pp. 133–137, 2019, doi: 10.1109/URALCON.2019.8877633.
- [3] L. de Oliveira-Assis *et al.*, "Optimal energy management system using biogeography based optimization for grid-connected MVDC microgrid with photovoltaic, hydrogen system, electric vehicles and Z-source converters," *Energy Convers Manag*, vol. 248, Nov. 2021, doi: 10.1016/j.enconman.2021.114808.
- [4] K. Jaiganesh, K. Bharath Simha Reddy, B. K. D. Shobhitha, and B. Dhanush Goud, "Enhancing the efficiency of rooftop solar photovoltaic panel with simple cleaning mechanism," in *Materials Today: Proceedings*, Elsevier Ltd, 2021, pp. 411–415. doi: 10.1016/j.matpr.2021.05.565.
- [5] M. Mustapha *et al.*, "Mathematical modeling and experimental validation of bifacial photovoltaic–thermal system with mirror reflector," *Case Studies in Thermal Engineering*, vol. 43, 2023, doi: 10.1016/j.csite.2023.102800.
- [6] C. R. Algarín, A. O. Castro, and J. C. Naranjo, "Dual-axis solar tracker for using in photovoltaic systems," *International Journal of Renewable Energy Research*, vol. 7, no. 1, pp. 137–145, 2017, doi: 10.20508/ijrer.v7i1.5147.g6973.
- [7] Y. Yao, Y. Hu, S. Gao, G. Yang, and J. Du, "A multipurpose dual-axis solar tracker with two tracking strategies," *Renew Energy*, vol. 72, pp. 88–98, 2014, doi: 10.1016/j.renene.2014.07.002.
- [8] A. Fudholi and K. Sopian, "R&D of photovoltaic thermal (PVT) systems: An overview," *International Journal of Power Electronics and Drive Systems*, vol. 9, no. 2. 2018. doi: 10.11591/ijped.v9.i2.pp803-810.
- [9] A. Taheri *et al.*, "Improving the performance of a nanofluid-based photovoltaic thermal module utilizing dual-axis solar tracker system: Experimental examination and thermodynamic analysis," *Appl Therm Eng*, vol. 196, Sep. 2021, doi: 10.1016/j.applthermaleng.2021.117178.
- [10] N. S. B. Rukman, A. Fudholi, I. Taslim, M. A. Indrianti, and I. N. Manyoe, "Overview on recent photovoltaic module cooling methods: Advances PVT systems," *International Journal of Electrical and Computer Engineering*, vol. 10, no. 1, 2020, doi: 10.11591/ijece.v10i1.pp15-21.
- [11] M. H. Tan *et al.*, "Optimization study of parasitic energy losses in photovoltaic system with dual-axis solar tracker located at different latitudes," in *Energy Procedia*, Elsevier Ltd, 2019, pp. 302–308. doi: 10.1016/j.egypro.2019.01.093.
- [12] I. Atmane, N. El Moussaoui, K. Kassmi, O. Deblecker, and N. Bachiri, "DEVELOPMENT OF AN INNOVATIVE COOKER (HOT PLATE) WITH PHOTOVOLTAIC SOLAR ENERGY," *J Energy Storage*, vol. 36, Apr. 2021, doi: 10.1016/j.est.2021.102399.
- [13] K. M. Tsang and W. L. Chan, "A single switch DC/DC converter with galvanic isolation and input current regulation for photovoltaic systems," *Solar Energy*, vol. 119, pp. 203–211, Sep. 2015, doi: 10.1016/j.solener.2015.07.005.
- [14] S. Samara and E. Natsheh, "Modeling the output power of heterogeneous photovoltaic panels based on artificial neural networks using low cost microcontrollers The proposed heterogeneous photovoltaic model system offer a proper and," *Heliyon*, vol. 4, p. 972, 2018, doi: 10.1016/j.heliyon.2018.
- [15] I. Atmane, K. Kassmi, O. Deblecker, and N. Bachiri, "Realization of autonomous heating plates operating with photovoltaic energy and solar batteries," in *Materials Today: Proceedings*, Elsevier Ltd, 2021, pp. 7408–7414. doi: 10.1016/j.matpr.2021.01.604.

Bukti Konfirmasi Review

(26 September 2023)

← 📄 ⌚ 🗑️ | 📧 ⌚ 🔄 | 📄 🗑️ ⋮

62 dari banyak < > ✎

Decision on submission to Case Studies in Thermal Engineering Eksternal > Kotak Masuk x

✕ 🖨️ 📄



Case Studies in Thermal Engineering <em@editorialmanager.com>
kepada saya ▾

Sel, 26 Sep 2023, 08.36 ☆ ↶ ⋮

Manuscript Number: CSITE-D-23-02502

Monitoring Solar Heat Intensity of Dual Axis **Solar** Tracker Control System : New Approach

Dear Dr anshory,

Thank you for submitting your manuscript to Case Studies in Thermal Engineering.

I have completed my evaluation of your manuscript. The reviewers recommend reconsideration of your manuscript following major revision. I invite you to resubmit your manuscript after addressing the comments below. Please resubmit your revised manuscript by Oct 16, 2023.

When revising your manuscript, please consider all issues mentioned in the reviewers' comments carefully: please outline every change made in response to their comments and provide suitable rebuttals for any comments not addressed. Please note that your revised submission may need to be re-reviewed.

To submit your revised manuscript, please log in as an author at <https://www.editorialmanager.com/csitel/>, and navigate to the "Submissions Needing Revision" folder.

Research Elements (optional)

This journal encourages you to share research objects - including your raw data, methods, protocols, software, hardware and more – which support your original research article in a Research Elements journal. Research Elements are open access, multidisciplinary, peer-reviewed journals which make the objects associated with your research more discoverable, trustworthy and promote replicability and reproducibility. As open access journals, there may be an Article Publishing Charge if your paper is accepted for publication. Find out more about the Research Elements journals at https://www.elsevier.com/authors/tools-and-resources/research-elements-journals?dgcid=ec_em_research_elements_email.

Kind regards,
Huihe Qiu
Editor-in-Chief

Case Studies in Thermal Engineering

Editor and Reviewer comments:

Reviewer #1: Dear Author,

I congratulate you for this work, and my recommendations within the context of the rules of this valuable journal are as follows:

It would be more appropriate to provide information about the mechanical construction of the hardware shown in Figure 4.

Figure 5 What is your explanation for vertical axis unity? I recommend that the interpretation of this figure be specific rather than presenting general information. Rearrange Figure 6.

There are 2 Figure 6s in your text, and it is appropriate to rearrange the second Figure 6 by writing the names of the axes and forming a compliance graph. In addition to your comment for Figure 7, I recommend that you add hourly analyzes to your comments.

Regards

Reviewer #2: The authors intends to introduce system to control sunlight intensity received on pv panel.
The paper reports new approach by using ESP8266 as main microcontroller.
The different between previous reported paper and this paper is main microcontroller.

I must comment the paper in not well-written. There are many loose ends that makes the review process difficult.
The authors should relate how the usage of ESP8266 microcontroller helps in increase the sunlight intensity.

There is mistake in labelling figure 6 in paragraph. And there are two Figure 6 in the paper.


Typos such as 'Baterey', 'Compariso' and 'Batterey'.

Only 10 trials are shown in Figure 5.

Analysis in Figure 6 not well-explained.

Figure 7 may be better shown using graph, etc compared to table.

Bukti Konfirmasi Artikel Setelah direview (13 Oktober 2023)

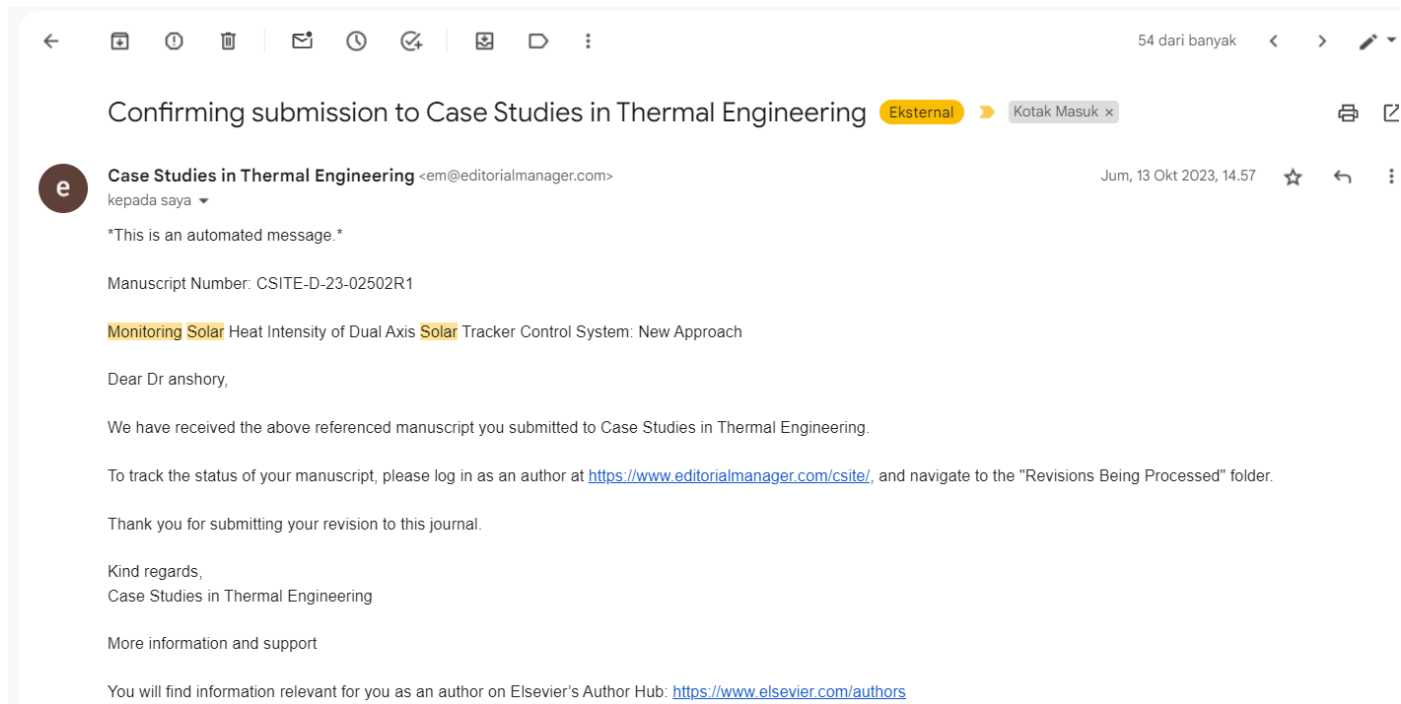

Rebuttal for Article No CSITE-D-23-02502 entitled " Monitoring Solar Heat Intensity of Dual Axis Solar Tracker Control System : New Approach " submitted to Case Studies In Thermal Engineering

We would like to thank the reviewer for his response and thorough review of the paper. A point wise rebuttal for each of the items raised by the reviewers is provided below.



Reviewer's comment	Author's response	Location in the manuscript (chapter, line, paragraph, etc)
Reviewer -1		
<p>It would be more appropriate to provide information about the mechanical construction of the hardware shown in Figure 4.</p>	<p>Thank you for your feedback on Figure 4. We understand the importance of providing detailed information about the mechanical construction of the dual-axis solar panel hardware. Therefore, in the revision we have added a description of the components used including their working principle.</p> <p>Revised</p> <p><i>Before:</i></p>  <p>Figure 4. Hardware Solar Tracker Dual Axis</p> <p><i>After:</i></p>  <p>Figure 4. Solar tracker dual axis hardware</p> <p>Figure 4 shows the dual-axis solar tracker hardware consisting of (1) Solar Panels, (2) A mechanical frame made of iron as a load-bearing solar panel, and (3) a control box panel. This control box panel is the command and control hub for the complete sun tracker system. Inside, the ESP8266 microprocessor serves as the operating brain, interpreting sensor data and issuing commands to the actuators. This ESP8266 microcontroller not only controls the sun tracking mechanism, but it also has Wi-Fi communication capabilities, allowing for remote connection and real-time system monitoring. Aside from the ESP8266, the control box panel contains various communication modules, a power supply to power the entire system, and protection components like as fuses to safeguard the device from power surges or overcurrent. The control box panel is divided into several electronic hardware components, as shown in Figure 5.</p>	<p>Manuscript document, line 169-181</p>

Figure 5 What is your explanation for vertical axis unity? I recommend that the interpretation of this figure be specific rather than presenting general information.

We as researchers and authors apologize for the lack of clarity in Figure 5. Therefore, we have revised the figure including units on the vertical axis and a more specific explanation of the data displayed.

Manuscript document, line 197-236

Revised
Before :

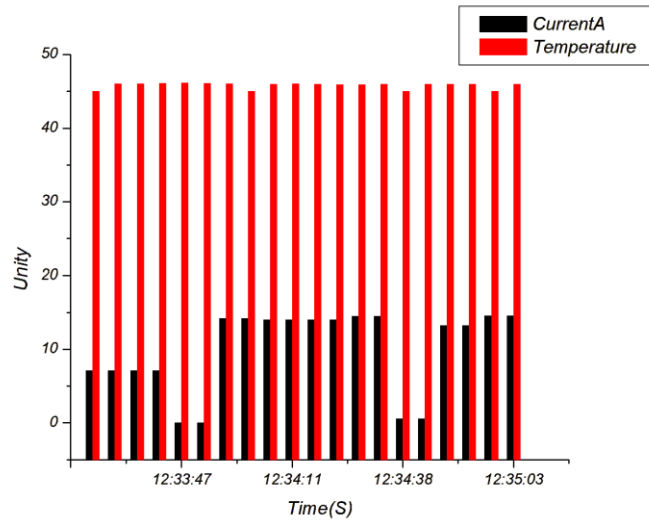


Figure 5. Graphic of Solar Panels Instrumentation

Figure 5 shows that the current measurement on the dual axis solar tracker shows the amount of electron-electron flow in the solar panel electrical circuit. This current data gives an idea of how efficient the solar panel is in converting solar energy into electrical energy. Current analysis is important to assess the performance of solar panels, because the greater the current generated, the more electrical energy the system can produce. The voltage measured on the dual axis solar tracker reflects the electrical potential generated by the solar panels. Voltage analysis shows the stability and power capacity that can be generated by the system. A voltage that is stable and within the expected specifications is a sign of a system that is working well. Temperature measurement on a dual axis solar tracker is an important indicator that affects the efficiency of solar panels. High temperatures can cause a decrease in energy conversion efficiency because the performance of solar panels tends to decrease as the temperature increases.

After :

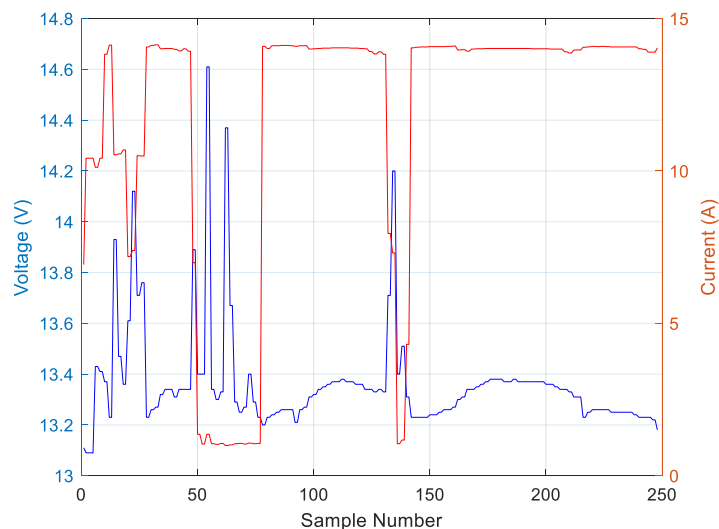


Figure 6. Graphic of Solar Panel Voltage and Current Measurements

	<p>Figure 6 shows that the voltage generated by the solar panel during the measurement process shows a fluctuating voltage. This is because, during the measurement, an object covers the sunlight or changes in the sun's position.</p> <p>Changes in the sun's position or objects that cover sun rays cause changes in temperature in the solar panel module, resulting in fluctuating voltage and current. This is in accordance with the first Kirchoff's Law equation regarding the ideal solar cell output current shown in Equation 1.</p> $I = I_{ph} - I_d \tag{1}$ <p>In addition, the mathematical equation that explains the I-V characteristics of photovoltaic solar cells is shown in Equation 2.</p> $I_d = I_s \left[\exp\left(\frac{qV_{oc}}{N_s K A T_o}\right) - 1 \right] \tag{2}$ <p>Inserting the value of I_d in equation (1) results in the ideal solar cell output current as shown in Equation 3.</p> $I = I_{ph} - I_s \left[\exp\left(\frac{qV_{oc}}{N_s K A T_o}\right) - 1 \right] \tag{3}$ <p>In an ideal case, the photovoltaic solar cell module produces photons directly proportional to the lighting and radiation intensity. Several parameters affect the output of a photovoltaic module device, as shown in Equation 4.</p> $I = N_p * I_{ph} - N_p * I_s \left[\exp\left(\frac{q(V+IR_s)}{N_s K A T_o}\right) - 1 \right] \tag{4}$ <p>Equation (4) describes the photocurrent I_{ph} proportional to the incident flux and independent of V (or Rs). This shows that the current generated is linearly dependent on solar radiation and is also affected by temperature according to the following I_{ph} equation illustrated in Equation (5)</p> $I_{ph} = [I_{sc} + K_i(T_o - T_r)] * \frac{G}{G_{ref}} \tag{5}$ <p>Equation (5) elucidates that the efficacy of solar panels is contingent upon a multitude of pivotal aspects. The G factor elucidates the direct correlation between the output current of a solar panel and the intensity of solar radiation it receives. In addition, temperature is a significant factor that influences the performance of solar panels. Temperature variations within the solar panel have a direct effect on the amount of current produced, with higher temperatures generally leading to a decrease in the efficiency of the solar cell. The equation presented offers a comprehensive analysis of the impact of factors such as sunshine intensity and temperature on the efficiency of solar panels. A comprehensive comprehension of these dynamics is crucial in the process of designing and optimizing solar panel systems. Solar tracker applications are of particular importance in the context of maximizing solar radiation absorption, while also considering temperature considerations, with the ultimate goal of attaining ideal energy efficiency.</p>	
<p>Rearrange Figure 6. There are 2 Figure 6s in your text, and it is appropriate to rearrange the second Figure 6 by writing the names of the axes and forming a compliance graph.</p>	<p>Thank you for your feedback regarding Figure 6. We understand the error in the numbering of the figures and will correct it immediately. The second Figure 6 will be numbered accordingly to avoid confusion. In addition, we will add labels to the axes and ensure that the graph meets the "compliance graph" standard, including displaying data clearly and providing necessary captions. We hope that these changes will improve the quality of the article and make it easier for readers to understand the content presented. Thank you once again for your feedback.</p> <p>Revised Before :</p>	<p>Manuscript document, line 236-248</p>

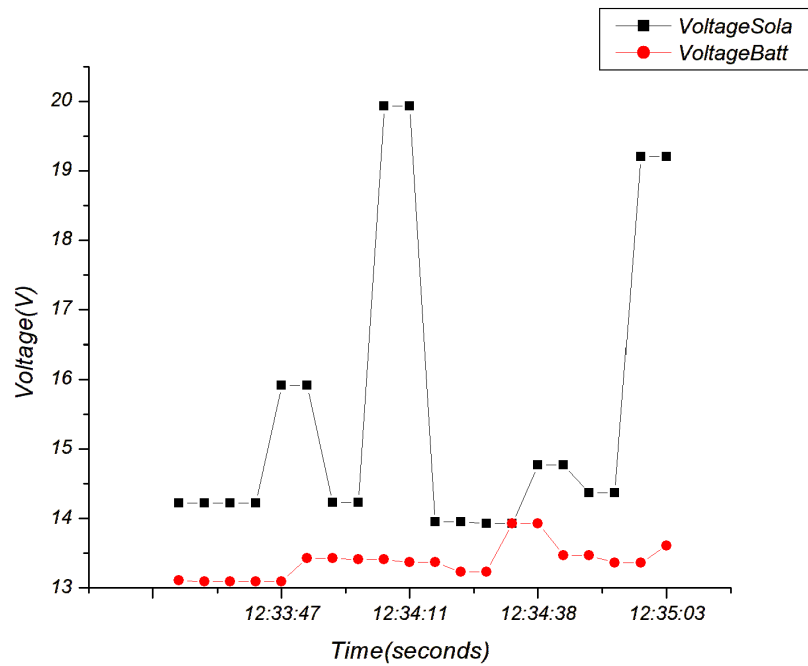


Figure 6. Compariso between Voltage Solar Panels and Battery

The figure 6. shows that the average voltage generated by the photovoltaic is about 15.01 Volts, while the average voltage stored in the Battery is about 13.38 Volts. The voltage difference between the Photovoltaic and Battery is between 0.58 Volts to 6.56 Volts. The voltage difference shows that the transfer of energy from the solar panel to the battery is very efficient. This is indicated by the small difference value.

As for the battery system, the test results are as follows in Figure 6.

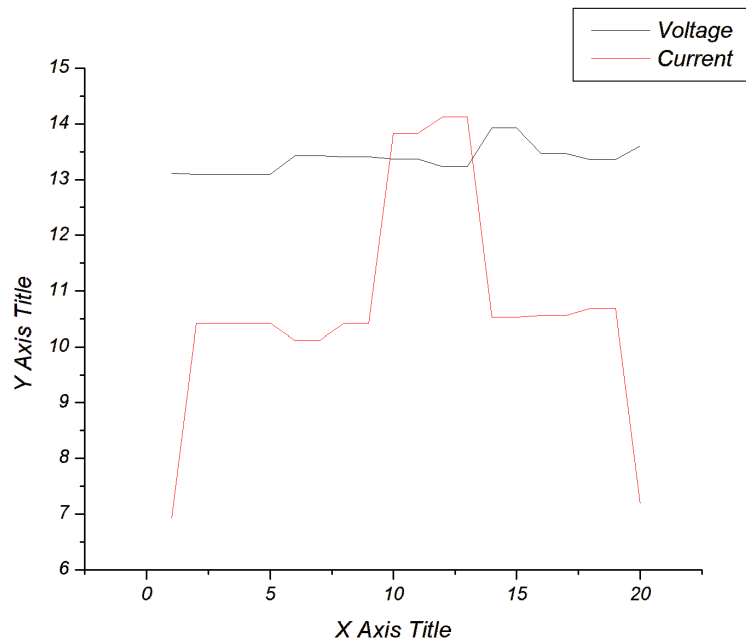


Figure 6. Result of Baterey Instrumentation

After :

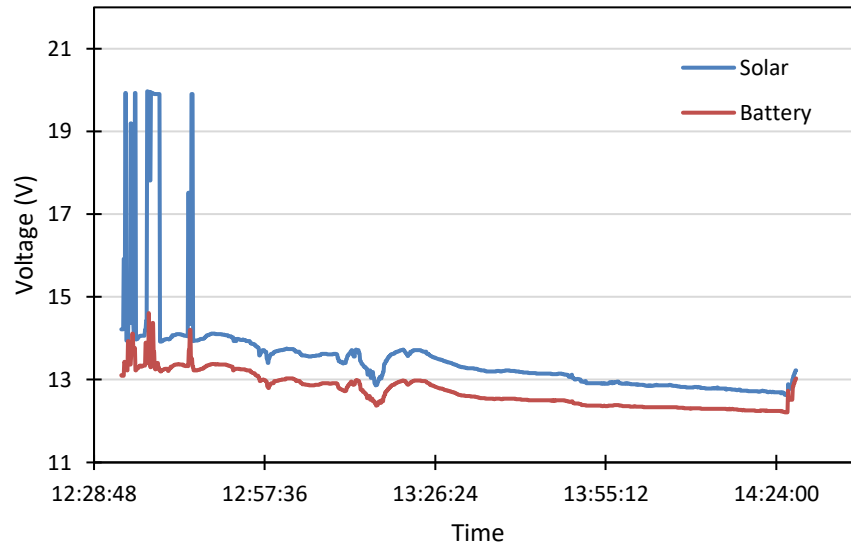


Figure 7. Comparison between voltage solar panels and battery

The figure 7 shows that the average voltage generated by the photovoltaic is about 13.52 Volts, while the average voltage stored in the battery is about 12.73 Volts. The average voltage difference between the Photovoltaic and battery is 0.79 Volts. The voltage difference shows that the transfer of energy from the solar panel to the battery is efficient, this is indicated by the small difference value.

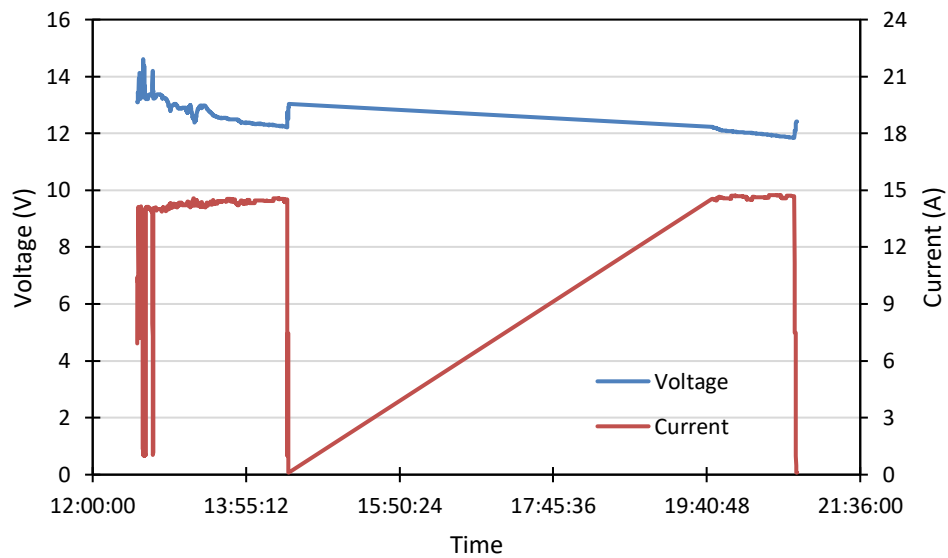


Figure 8. Result of Battery Instrumentation

In addition to your comment for Figure 7, I recommend that you add hourly analyzes to your comments.

We would like to thank the reviewer for their feedback on Figure 7. We agree and have added testing and performing hourly analysis in our revision.

Revised Before :


Beside that results Figure 7. show that the performance of the solar tracker in adapting to changes in heat intensity is influenced by affecting the materials, motor performance, and other mechanical drives used in the solar tracker. A good tracking response in hot conditions is key to ensuring that the solar panel remains facing the right direction of sunlight, so as to maximize the energy generated.

After :

Based on the analysis of temperature data and subsequent experimental verification, it was observed that there was a notable increase in

Manuscript document, line 257-270

	<p>temperature during the time range between 13:00 and 14:00. This increase in temperature exhibited a positive correlation with the intensity of solar radiation. During the specified temporal interval, the solar panel equipped with a two-axis tracking system exhibited ideal performance by consistently aligning its orientation towards the sun, hence maximising energy absorption. It is imperative to acknowledge that the efficacy of a solar tracker in responding to variations in thermal intensity is contingent not only upon the intensity of solar radiation, but also upon the constituent materials, motor functionality, and additional mechanical elements incorporated within the tracker system. The prompt highlights the significance of the tracker's prompt and precise response to high temperatures. This is essential for maintaining the solar panels' optimal alignment with the sun, hence maximising the efficiency of solar energy conversion into electricity.</p>	
<p>Reviewer -2</p>		
<p>The authors intends to introduce system to control sunlight intensity received on pv panel. The paper reports new approach by using ESP8266 as main microcontroller .</p> <p>The different between previous reported paper and this paper is main microcontroller .</p>	<p>We are very grateful for the reviewer's input regarding the important role of the ESP8266 microcontroller in increasing the intensity of sunlight. In the revision we have provided a more in-depth explanation of the contribution of the ESP8266 microcontroller in increasing the intensity of sunlight.</p> <p>Revised: We have added an explanation at the end of sub II. Material and Method.</p> <p>The key reason for using the ESP8266 microcontroller is that it has Wi-Fi integration, which allows for direct internet access. This opens up a wide range of possibilities for further research and integration with the Internet of Things (IoT) concept in solar energy absorption applications. This connectivity enables remote monitoring, control, and data analysis of solar panels in real time. As a result, there is a huge gain in system administration accessibility and flexibility.</p>	<p>Manuscript document, line 110-115</p>
<p>I must comment the paper in not well-written. There are many loose ends that makes the review process difficult.</p>	<p>I appreciate your valuable input and constructive critique. We express regret for any lack of clarity in the composition that may have hindered the evaluation procedure. Our objective is to enhance the writing's quality in order to achieve greater coherence and facilitate comprehension.</p> <p>In response to your enquiry pertaining to the influence of the ESP8266 microcontroller on enhancing solar panel sunlight absorption, it is important to clarify that the primary objective of the ESP8266 does not involve direct amplification of sunlight intensity. The microcontroller</p>	
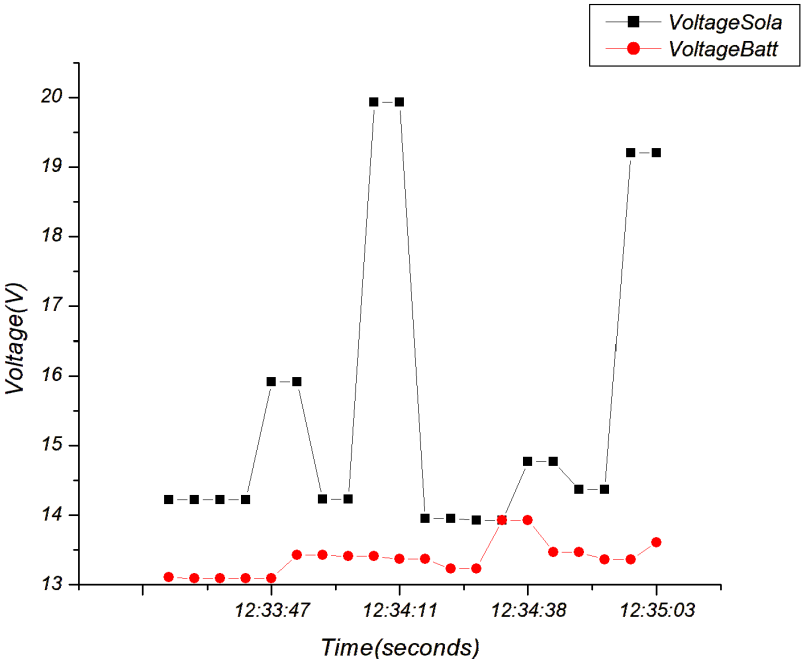
<p>The authors should relate how the usage of ESP8266 microcontroller helps in increase the sunlight intensity.</p>	<p>functions as the central processing unit of the sun tracking system that has been devised, enabling the solar panels to be positioned in a manner that optimises the capture of solar radiation over the course of the day.</p> <p>The ESP8266 enables our system to access online sources and retrieve data such as weather forecasts, sun positions, and other relevant information. The aforementioned data is afterwards utilised to enhance the placement of the solar panel. Furthermore, the ESP8266's wireless communication capabilities provide real-time monitoring and remote system control, thereby enhancing operational flexibility and management efficiency.</p>	
<p>There is mistake in labelling figure 6 in paragraph. And there are two Figure 6 in the paper. Typos such as 'Baterey', 'Compariso' and 'Batterey'.</p>	<p>We, the researchers and authors, apologize for the writing errors contained in our paper. We have corrected the writing errors in the revision that we sent.</p>	<p>Manuscript document</p>
<p>Only 10 trials are shown in Figure 5.</p>	<p>Thank you for the observations that the reviewer made on the test results. We realize the importance of having more data so we have added more experiments to get the appropriate data.</p>	
<p>Analysis in Figure 6 not well-explained.</p>	<p>We apologize for the lack of clarity in Figure 6 and we will ensure the analysis is explained in more depth in our revision.</p> <p>Revised: Before :</p>  <p>Figure 6. Compariso between Voltage Solar Panels and Batterey</p>	<p>Manuscript document Line : 236-243</p>

The figure 6. shows that the average voltage generated by the photovoltaic is about 15.01 Volts, while the average voltage stored in the Battery is about 13.38 Volts. The voltage difference between the Photovoltaic and Battery is between 0.58 Volts to 6.56 Volts. The voltage difference shows that the transfer of energy from the solar panel to the battery is very efficient. This is indicated by the small difference value.

After :

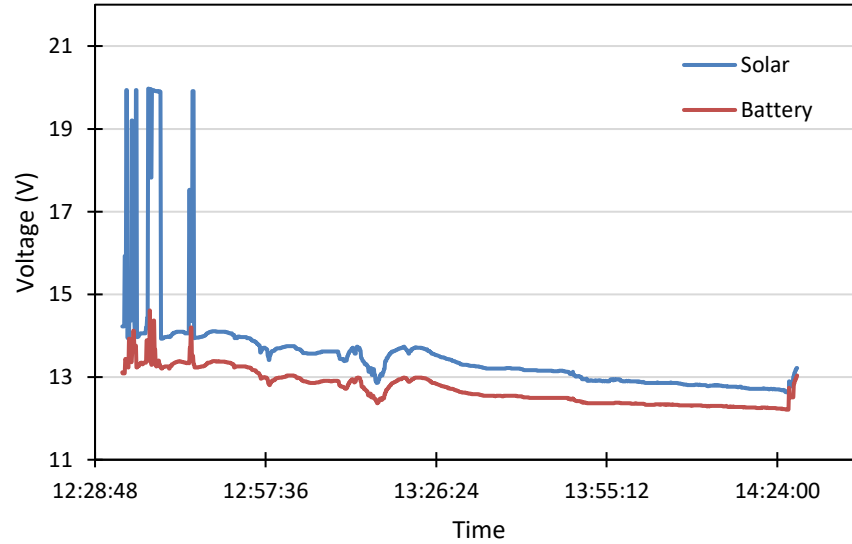


Figure 7. Comparison between voltage solar panels and battery

The figure 7 shows that the average voltage generated by the photovoltaic is about 13.52 Volts, while the average voltage stored in the battery is about 12.73 Volts. The average voltage difference between the Photovoltaic and battery is 0.79 Volts. The voltage difference shows that the transfer of energy from the solar panel to the battery is efficient, this is indicated by the small difference value.

Figure 7 may be better shown using graph, etc compared to table.

Thank you very much for the reviewer's suggestion. We agree that visualizations in the form of graphs are more informative than tables. We have replaced it in the form of graph visualization.

Revised :
Before :

Time	Temperature (C)
12:33:24	12.7
12:33:29	46.06
12:33:36	46.06
12:33:41	46.13
12:33:47	46.19
12:33:52	46.13
12:33:57	46.06
12:34:01	12.7
12:34:06	12.7
12:34:11	46.06
12:34:16	46
12:34:23	45.94
12:34:28	45.94
12:34:33	46
12:34:38	12.7
12:34:44	46
12:34:49	12.7
12:34:53	46
12:34:58	12.7
12:35:03	12.7
12:35:08	12.7
12:35:16	12.7
12:35:21	46.06
12:35:27	46
12:35:32	46
12:35:37	46.06
12:35:42	12.7

Figure 7. Heat Intensity of Solar Panels

After :

Manuscript document
Line : 257

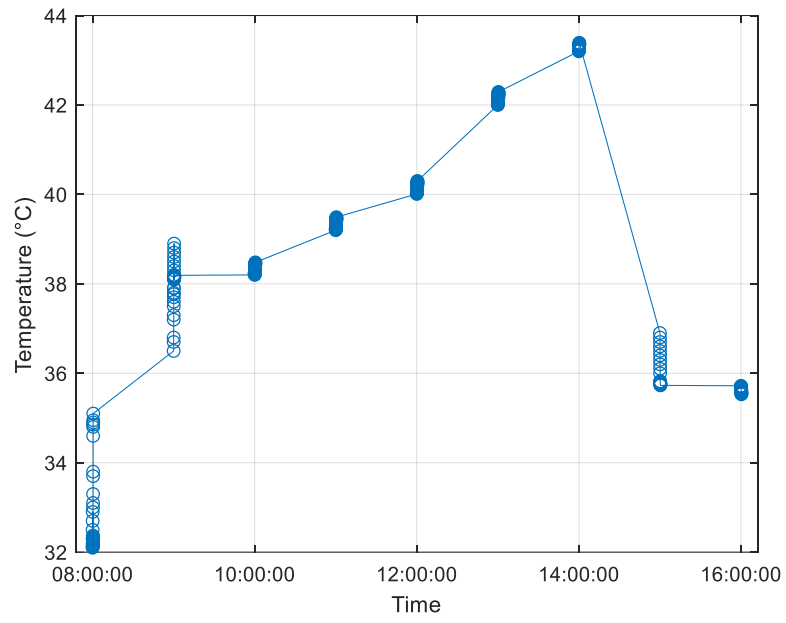


Figure 9. Heat intensity of solar panels

Bukti Konfirmasi Accepted Article (18 Novemberr 2023)

Decision on submission to Case Studies in Thermal Engineering

Eksternal

Kotak Masuk x



Case Studies in Thermal Engineering <em@editorialmanager.com>

Sab, 18 Nov 2023, 20.46



kepada saya

Manuscript Number: CSITE-D-23-02502R1

Monitoring Solar Heat Intensity of Dual Axis Solar Tracker Control System: New Approach

Dear Dr anshory,

Thank you for submitting your manuscript to Case Studies in Thermal Engineering.

I am pleased to inform you that your manuscript has been accepted for publication.

My comments, and any reviewer comments, are below.

Your accepted manuscript will now be transferred to our production department. We will create a proof which you will be asked to check, and you will also be asked to complete a number of online forms required for publication. If we need additional information from you during the production process, we will contact you directly.

We appreciate you submitting your manuscript to Case Studies in Thermal Engineering and hope you will consider us again for future submissions.

We encourage authors of original research papers to share the research objects – including raw data, methods, protocols, software, hardware and other outputs – associated with their paper. More information on how our open access Research Elements journals can help you do this is available at https://www.elsevier.com/authors/tools-and-resources/research-elements-journals?dgcid=ec_em_research_elements_email.

Kind regards,
Huihe Qiu
Editor-in-Chief



Case Studies in Thermal Engineering

izza anshory | Logout

Home Main Menu Submit a Manuscript About Help

← Submissions with an Editorial Office Decision for Author

Page: 1 of 1 (1 total completed submissions)

Results per page 10

Action	Manuscript Number	Title	Initial Date Submitted	Status Date	Current Status	Date Final Disposition Set	Final Disposition
Action Links	CSITE-D-23-02502	Monitoring Solar Heat Intensity of Dual Axis Solar Tracker Control System: New Approach	Jul 21, 2023	Nov 18, 2023	Completed - Accept	Nov 18, 2023	Accept



Dear Author, your article has been accepted Eksternal Kotak Masuk x

Case Studies in Thermal Engineering <service@author.email.elsevier.com>
kepada saya ▾

Jum, 24 Nov 2023, 19.58 ☆ ↶ ⋮

If you are unable to view this message correctly, [click here](#)



Congratulations on your accepted article!

Dear Author,

We recognize you have a choice of where to submit your research and we thank you for choosing to publish with *Case Studies in Thermal Engineering*.

As an expert in the field, you are best placed to explain why your article, **Monitoring solar heat intensity of dual axis solar tracker control system: New approach**, is interesting or impactful to a wider audience. Find out how you can help your article get the visibility it deserves:

Bukti Konfirmasi Continue Submission Process & Article Processing Fee (22 November 2023)

Your Elsevier invoice OAD0000364952 Eksternal Kotak Masuk x



OElsevierInvoicesNoReply@elsevier.com
kepada saya ▾

Rab, 22 Nov 2023, 20.02 ☆ ↶



Dear Sir/Madam,

Please find your invoice **OAD0000364952** attached to this email.

Transaction Number	Due Date	Currency	Transaction Amount
OAD0000364952	22-DEC-2023	USD	1,030.00



Elsevier B.V.
Radarweg 29
1043 NX Amsterdam
Netherlands
[Customer Support Center](#)

Invoice

Mailing Address

Izza Anshory
Jalan Tambak Asri
Morokrembangan
Krebangan 60178
Indonesia

Supply to

Izza Anshory
Jalan Tambak Asri
Morokrembangan
Krebangan 60178
Indonesia

Customer reference ECR-102806603
Invoice number OAD0000364952
Invoice date 22-NOV-2023
Due date 22-DEC-2023
Terms 30 Days
Your PO
Customer tax reg no -

Line	Product reference	Item	Qty	Net unit price	Net amount	Tax	Total amount
1	EPR-1000FS	Case Studies in Thermal Engineering Article Publishing Charge Article: Monitoring solar heat intensity of dual axis solar tracker control system: New approach Author: Dr izza anshory PII: S2214157X23010973 Tax @ 0.00%	1	1,030.00	1,030.00	0.00	1,030.00
Total					1,030.00	0.00	1,030.00
Total due						USD	1,030.00



Izza Anshori <izzaanshory@umsida.ac.id>
kepada OAElsevierInvoicesNoReply ▾

23 Nov 2023, 14.47 ★ ↶

Dear Director of Elsevier

I have made payment for invoice number OAD0000364952. I attach the proof of payment below.

Best Regard
Dr. Izza Anshory



Satu lampiran • Dipindai dengan Gmail





BNI

Transaksi Berhasil

No. Ref	S10TPKM000381423
Tanggal Transaksi	23-11-2023
Waktu Transaksi	14:25:28 WIB
Jenis Layanan	OTR HARD CURRENCY
Nomor Rekening Tujuan	*****181
Nama Penerima	Elsevier B.V
Alamat Penerima	Radarweg 29
Bank Tujuan	ING BANK N.V, NETHERLANDS
BIC	INGBNL2AXXX
Kurs	15.665
Beban Ongkos Koresponden	Beban Rekening Pengirim (OUR)
Biaya Kirim BNI	2.7
Ongkos Bank Koresponden	5
Total Nominal	IDR 16.255.570,00
Tujuan Transaksi	Personal purpose
Rekening Debet	*****927

Bukti Artikel Yang Publish
(23 November 2023)



Monitoring solar heat intensity of dual axis solar tracker control system: New approach

Izza Anshory^{a,b,*}, Jamaaluddin Jamaaluddin^{a,b}, A'razy Fahrudin^c, Ahmad Fudholi^{b,d}, Yadi Radiansah^b, Dalmasius Ganjar Subagio^b, Yusuf Suryo Utomo^b, Aep Saepudin^b, Oo Abdul Rosyid^b, Kamaruzzaman Sopian^e

^a Department of Electrical Engineering, Universitas Muhammadiyah Sidoarjo, Indonesia

^b Research Center for Energy Conversion and Conservation, National Research and Innovation Agency (BRIN), Indonesia

^c Departement of Mechanical Engineering, Universitas Muhammadiyah Sidoarjo, Indonesia

^d Solar Energy Research Institute, Universiti Kebangsaan Malaysia, 43600, Bangi, Selangor, Malaysia

^e Department of Mechanical Engineering, Universiti Teknologi PETRONAS, Seri Iskandar, 32610, Perak Darul Ridzuan, Malaysia

ARTICLE INFO

Handling editor: Huihe Qiu

Keywords:

Photovoltaic system
Solar tracker dual-axis
ESP8266 microcontroller
LDR sensor

ABSTRACT

Control of the amount of solar energy successfully absorbed by photovoltaic system equipment that can follow the movement of sunlight vertically and horizontally at any time is a very urgent need. The method used in this research activity is the utilization of the ESP8266 microcontroller as the primary control of photovoltaic movements that can follow the direction of sunlight based on information from the Light Dependent Resistor (LDR) sensor. The data variables measured and stored include current, voltage, and temperature, which are then processed and transmitted by the ESP 8266 microcontroller to the user through the Internet of Things (IoT) media to the BLINK application. The experimental results show that the proposed system using the ESP8266 microcontroller and LDR sensor increases efficiency, accuracy, speed, and convenience in the monitoring and control system of sunlight intensity by an average of 65%, compared with the manual monitoring system.

1. Introduction

Renewable energy sources, namely solar energy, which is extensive throughout the year. Geographically, the opportunity for the availability of solar energy is quite significant, which is in the energy range of 4.8–6.0 kWh/m². By 2050, it's anticipated that the amount of electricity produced worldwide from RE sources will reach almost 45 trillion kWh. By 2020, 20% of Europe's total energy consumption was expected to come from renewable sources. By 2040, the Asia Pacific Economic Cooperation (APEC) countries' installed capacity would total 6235 GW, with 35% of that coming from renewable sources [1]. Solar energy's large availability needs to be maximized in everyday life, such as solar power plants [2]. The utilization of solar energy for various activities in everyday life has several advantages; among others, the energy is available abundantly, easy to maintain, has no noise, is able to work automatically, and can be applied on and off the grid [3]. In addition to having advantages, the utilization of solar energy has obstacles, namely the limited time in the absorption of sunlight at sunrise and sunset and the uncertain intensity of light or solar radiation. Due to these limitations, an innovation is needed to track the movement of sunlight [4].

* Corresponding author. Departement of Electrical Engineering, Universitas Muhammadiyah Sidoarjo, Indonesia.
E-mail address: izzaanshory@umsida.ac.id (I. Anshory).

<https://doi.org/10.1016/j.csite.2023.103791>

Received 21 July 2023; Received in revised form 13 October 2023; Accepted 18 November 2023

Available online 23 November 2023

2214-157X/© 2023 The Authors. Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

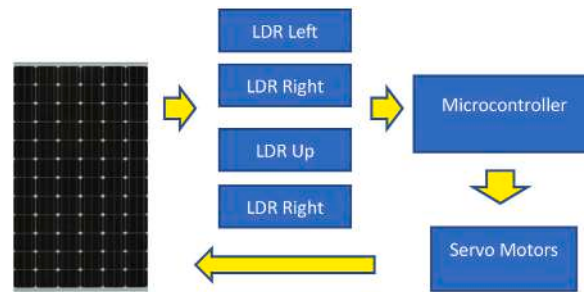


Fig. 1. Block diagram of dual axis solar tracker movement instrumentation system.

As a country in the equatorial region, Indonesia has the potential for a solar tracker is, a photovoltaic system consisting of a support structure equipped with a motor [5]. This system is designed to automatically direct the solar panels throughout the day so that they always face the sun and capture maximum sunlight [6]. Therefore, there are several classifications of solar trackers, namely the classification of solar trackers based on the control system used, the driver used, the tracking strategy used, or on the basis of the degree of freedom of the movement exhibited by the system. Solar trackers based on the control system are divided into two, namely the open sun movement tracking system and the closed sun movement tracking system [7]. The open type of solar tracking system is where the control signals provided to the motors are based on the current input data and system algorithms only. The system has no feature to observe and evaluate the output data with respect to the desired output [8]. Whereas a sun tracking system based on closed control means a sun movement tracking system that provides feedback control to detect errors and provide the necessary drive signals by the motor.

Based on the drive system used, sun tracking systems are classified into passive sun tracking systems and active sun tracking systems. A passive tracking system is a system that uses thermal expansion of a low-boiling gas material or liquid that is compressed and pushed to one side or the other as a method to track the movement of sunlight, while an active tracking system is a system that tracks the movement of sunlight by utilizing microprocessor technology, motors, and light sensors to increase the amount of solar energy absorbed [9]. In addition, sun tracking systems are also distinguished by freedom of movement. The first is a single-axis tracking system with one degree of freedom in one axis of rotation, and the second is a double axis with two degrees of freedom as the axis of rotation [10].

Research on solar trackers has been widely developed, including the use of Bluetooth modules as a communication medium between Arduino and Android applications to improve the performance of solar trackers that can be monitored via smartphones. The study also compared the power received by solar panels using a 2-axis solar tracker to provide 11.57% greater power output compared to static solar panels [6]. A two-axis tracking system to obtain energy from sunlight using Arduino Uno as the central controller of the system and four light-dependent resistors (LDRs) have been used to detect sunlight and maximum light intensity. Two servo motors have been used to rotate the solar panel according to the sunlight source detected by the LDRs. Furthermore, an ESP8266 WIFI device is used as an intermediary between the device and the IoT monitoring system [11]. The IoT monitoring system is a website that serves to store data. The efficiency of this system has been tested and compared with a single axial sun tracker. As a result, the two-axis solar tracking system produces more power, voltage, and current [12].

A sun tracking system can substantially increase electricity production on photovoltaic systems, utilizing feedback control theory and light-dependent resistor four LDR sensors and microcontroller-based electronic circuits [13]. A dual-axis sun tracking system generates more energy as the solar array can remain aligned perpendicular to the sun. Comparative results have been presented between static and automated stand-alone dual-axis solar systems, showing that integrated grid systems have better performance. Photovoltaics converts solar energy into electrical energy by absorbing the intensity of sunlight. However, the intensity of sunlight absorbed always changes in one day, so the intensity of sunlight absorption between morning, afternoon, and evening is different. This causes the power output of the photovoltaic to be unstable. However, a device that can already overcome this is called a solar charge controller [14].

Based on several previous studies, a dual-axis solar tracker system has been carried out to absorb as much energy as possible by utilizing ESP8266 microcontroller technology and LDR sensors. Therefore, this study discusses the control and instrumentation system of the 160 WP dual-axis solar tracker system that utilizes ESP8266 microcontroller technology and LDR sensors.

2. Material and methods

The block diagram for the instrumentation design of dual-axis solar tracker control system based on an ESP8266 microcontroller and light sensor is shown in Fig. 1. Fig. 1 shows the block diagram of the dual-axis solar tracker control system based on the movement of sunlight. In principle, the control system for tracking the movement of sunlight has two axes: the horizontal axis (azimuth) and the vertical axis (elevation). The working process for the dual-axis solar tracker system is that the light sensor detects the intensity of the surrounding light and produces a proportional electrical signal. The signal from the light sensor is sent to the microcontroller [15]. The microcontroller compares the received signal with a predetermined reference value or threshold. Based on the comparison, the microcontroller calculates the position changes that need to be made by the solar panel to face the sun optimally [15]. The microcontroller generates output signals that are sent to the motors on the horizontal shaft and vertical shaft of the solar tracker, and then the



Fig. 2. NodeMCU ESP 8266 system with solar panel.



Fig. 3. Dual axis solar tracker instrumentation system design with LDR and ESP 8266.

motors move the shafts so that the solar panels move to follow the sun's movement accurately [16]. This process continues throughout the day so that the solar panels always face the sun at an optimal angle to maximize the reception of solar energy.

Many of the systems described in earlier literature use Bluetooth modules with constrained capability and range, and they frequently rely on microcontrollers without internet access [17]. However, this study uses the ESP8266, whose WiFi integration allows for an internet connection and real-time solar panel control, monitoring, and data analysis. In addition to improving solar tracking and control, this promotes integration with the Internet of Things (IoT) idea, laying the groundwork for more flexible and integrated solar energy solutions into a broader energy infrastructure.

2.1. Servo motors

A *servo motor* is a direct current (DC) motor equipped with a control circuit with a closed feedback system that is integrated with the motor. The position of the rotary axis in the servo will be informed back to the control circuit inside the servo motor [18]. The servo motor comprises a DC motor, gearbox, variable resistor or potentiometer, and control circuit. The servo motor in this dual-axis solar tracker system can work clockwise (CW) and counterclockwise (CCW). CW is the direction of rotation of the servo motor in the clockwise direction. When the servo motor is activated to rotate CW, the shaft will move clockwise when viewed from the direction of the motor shaft exit. CCW is the direction of rotation of the servo motor counterclockwise. When a servo motor is enabled to rotate CCW, its shaft will move counterclockwise when viewed from the motor shaft exit direction. The ability of a servo motor to rotate both CW and CCW allows for flexible use in various applications. For example, in a dual-axis solar tracker, a servo motor on the horizontal shaft can move the solar panel to the left (CW) or right (CCW) to follow the sun's movement from east to west throughout the day. The selection of the appropriate rotation direction depends on the application's specific needs and the system configuration. A servo motor controller such as a microcontroller will provide appropriate control signals to rotate the servo motor in the desired direction (CW or CCW) based on the logic and calculations performed in the sun tracking system [19].

2.2. NodeMCU ESP 8266

NodeMCU ESP8266 is an IoT-based microcontroller module that can be used as one of the controller components to control the sun tracking system, such as in Fig. 2. NodeMCU ESP8266 can connect and control sensors, servo motors, and other devices involved in sun tracking. The NodeMCU ESP8266 provides various input/output (I/O) pins that are used to connect and control these devices. The NodeMCU commands the INA219 sensor, where the INA219 sensor is useful for reading the voltage and current values generated by the solar panel. The INA219 sensor reading uses an I2C communication line with a high level of precision. Furthermore, the measurement results and data collection are sent via IoT to the Blynk application.

Sensor Data Acquisition: ESP8266, connected to various sensors, captures data from light, temperature, or position sensors. ESP8266 to transmit to an external data source as a monitoring tool or for further analysis. Based on the sensor data and calculation of the required angle, the ESP8266 generates the proper control signals to drive the servo motor to the desired position.

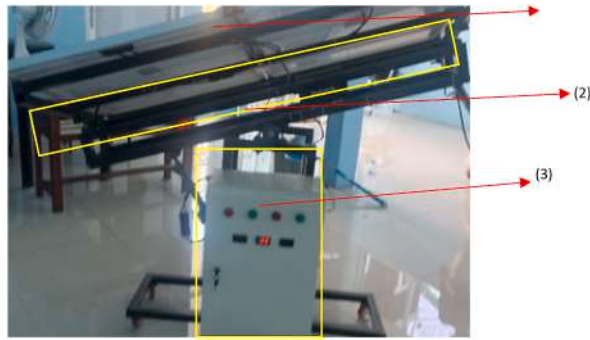


Fig. 4. Solar tracker dual axis hardware.

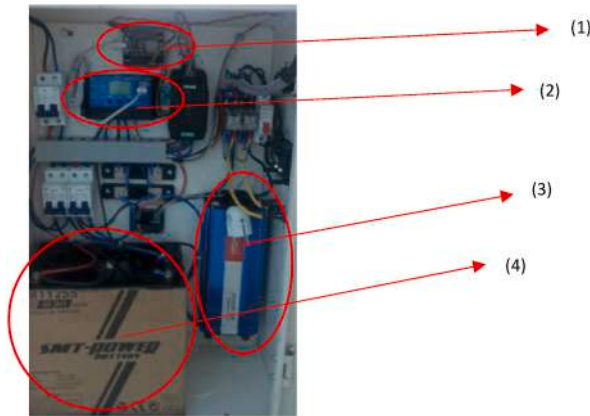


Fig. 5. Solar panel control hardware.

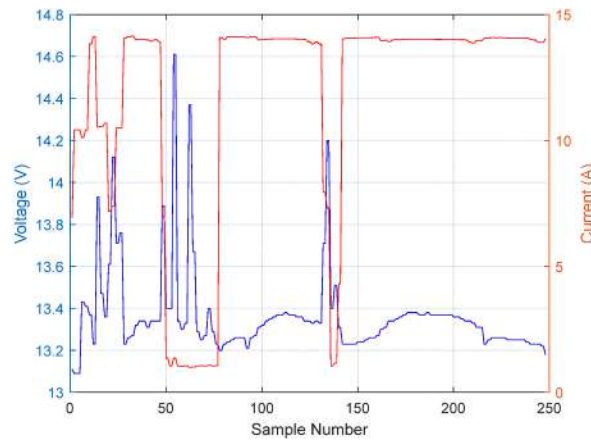


Fig. 6. Graphic of solar panel voltage and current measurements.

3. Result and analysis

This section presents the results of the design, measurement, and analysis of an instrumentation system that uses NodeMCU ESP8266 to measure voltage, current, and power in solar panel installations. These results include an analysis of measurement accuracy, system stability, and responsiveness to voltage, current, and power value changes. In addition, the advantages generated by the use of ESP8266 in this system will also be discussed, as well as the possibility of further development to improve the efficiency and reliability of the instrumentation system for measuring voltage, current, and power in solar panel installations as shown in Fig. 3.

The results of assembling the hardware components for the dual-axis solar tracker using the ESP8266 microcontroller are shown in Fig. 4. Fig. 4 shows the dual-axis solar tracker hardware consisting of (1) Solar Panels, (2) A mechanical frame made of iron as a load-

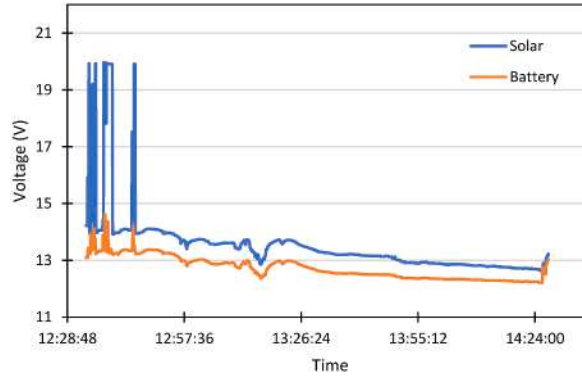


Fig. 7. Comparison between voltage solar panels and battery.

bearing solar panel, and (3) a control box panel. This control box panel is the command and control hub for the complete sun tracker system. Inside, the ESP8266 microprocessor serves as the operating brain, interpreting sensor data and issuing commands to the actuators. This ESP8266 microcontroller not only controls the sun tracking mechanism, but it also has Wi-Fi communication capabilities, allowing for remote connection and real-time system monitoring. Aside from the ESP8266, the control box panel contains various communication modules, a power supply to power the entire system, and protection components like as fuses to safeguard the device from power surges or overcurrent. The control box panel is divided into several electronic hardware components, as shown in Fig. 5.

Fig. 5 shows the control hardware components to move the solar panels, consisting of (1) ESP8266 microcontroller, (2) Solar charge controller, (3) Inverter (4) Solar panels battery. The dual-axis solar tracker operation starts with the LDR sensor attached to the microcontroller receiving sunlight intensity, and then the resistance of the LDR changes its value. Changes in this resistance value will be proportional to changes in sunshine intensity. The ESP8266 microcontroller will transform the number of analog signals into digital signals via the embedded analog to digital converter component. The microcontroller system then processes this digital data to calculate the intensity of sunlight received by the solar panels. The microcontroller system will move the solar panels into the optimal position using instructions to the servo motor based on the sunshine intensity calculation.

These measurements include various important parameters such as voltage, current, and temperature. Careful analysis of the data over a limited period of time reveals the performance of the solar panels and their potential efficiency in generating electrical energy from sunlight. The test results for trials are shown in Fig. 6.

Fig. 6 shows that the voltage generated by the solar panel during the measurement process shows a fluctuating voltage. This is because, during the measurement, an object covers the sunlight or changes in the sun's position. Changes in the sun's position or objects that cover sun rays cause changes in temperature in the solar panel module, resulting in fluctuating voltage and current. This is in accordance with the first Kirchoff's Law equation regarding the ideal solar cell output current shown in Equation (1).

$$I = I_{ph} - I_d \quad (1)$$

In addition, the mathematical equation that explains the I-V characteristics of photovoltaic solar cells is shown in Equation (2).

$$I_d = I_s \left[\exp\left(\frac{qV_{oc}}{N_s K A T_o}\right) - 1 \right] \quad (2)$$

Inserting the value of I_d in Equation (1) results in the ideal solar cell output current as shown in Equation (3).

$$I = I_{ph} - I_s \left[\exp\left(\frac{qV_{oc}}{N_s K A T_o}\right) - 1 \right] \quad (3)$$

In an ideal case, the photovoltaic solar cell module produces photons directly proportional to the lighting and radiation intensity. Several parameters affect the output of a photovoltaic module device, as shown in Equation (4).

$$I = N_p * I_{ph} - N_p * I_s \left[\exp\left(\frac{q(V + IR_s)}{N_s K A T_o}\right) - 1 \right] \quad (4)$$

Equation (4) describes the photocurrent I_{ph} proportional to the incident flux and independent of V (or R_s). This shows that the current generated is linearly dependent on solar radiation and is also affected by temperature according to the following I_{ph} equation illustrated in Equation (5).

$$I_{ph} = [I_{sc} + K_i(T_o - T_r)] * \frac{G}{G_{ref}} \quad (5)$$

Equation (5) elucidates that the efficacy of solar panels is contingent upon a multitude of pivotal aspects. The G factor elucidates the

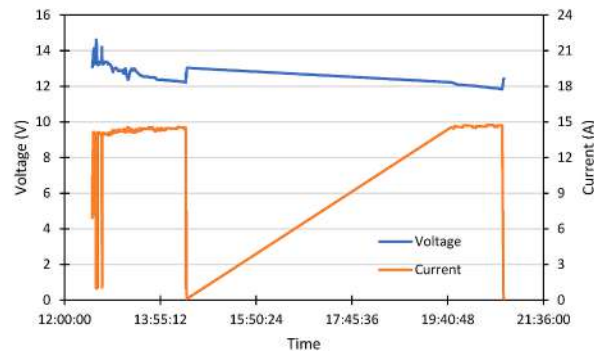


Fig. 8. Result of battery instrumentation.

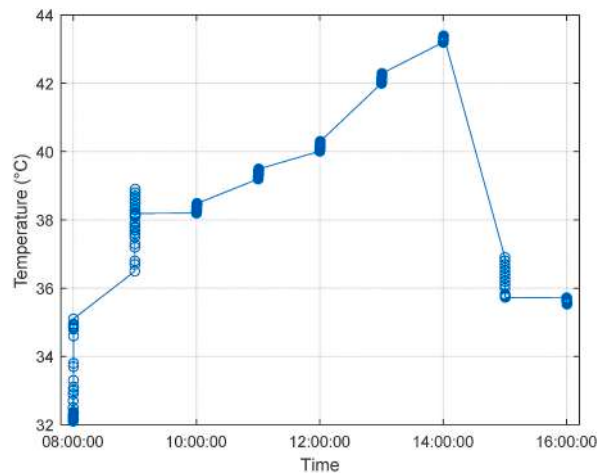


Fig. 9. Heat intensity of solar panels.

direct correlation between the output current of a solar panel and the intensity of solar radiation it receives. In addition, temperature is a significant factor that influences the performance of solar panels. Temperature variations within the solar panel have a direct effect on the amount of current produced, with higher temperatures generally leading to a decrease in the efficiency of the solar cell. The equation presented offers a comprehensive analysis of the impact of factors such as sunshine intensity and temperature on the efficiency of solar panels. A comprehensive comprehension of these dynamics is crucial in the process of designing and optimizing solar panel systems. Solar tracker applications are of particular importance in the context of maximizing solar radiation absorption, while also considering temperature considerations, with the ultimate goal of attaining ideal energy efficiency.

Fig. 7 shows that the average voltage generated by the photovoltaic is about 13.52 V, while the average voltage stored in the battery is about 12.73 V. The average voltage difference between the Photovoltaic and battery is 0.79 V. The voltage difference shows that the transfer of energy from the solar panel to the battery is efficient, this is indicated by the small difference value.

As for the battery system, the test results are as follows in Fig. 8. Current measurements on a battery indicate the amount of electrical charge flowing into or out of the battery during charging or discharging. This current data shows how well the battery undergoes the charging process and how much power can be generated when the battery is used to supply electricity. Stable current test results that are in line with battery specifications indicate good performance and the ability of the battery to store and release energy efficiently. If the test results show a low or fluctuating voltage outside the normal range, this could indicate a problem with the battery cells or management system. A significant voltage drop during battery use could indicate low battery capacity or unfavorable conditions for use. The result of experimental heat intensity is presented in Fig. 9.

Based on the analysis of temperature data and subsequent experimental verification, it was observed that there was a notable increase in temperature during the time range between 13:00 and 14:00. This increase in temperature exhibited a positive correlation with the intensity of solar radiation. During the specified temporal interval, the solar panel equipped with a two-axis tracking system exhibited ideal performance by consistently aligning its orientation towards the sun, hence maximizing energy absorption. It is imperative to acknowledge that the efficacy of a solar tracker in responding to variations in thermal intensity is contingent not only upon the intensity of solar radiation, but also upon the constituent materials, motor functionality, and additional mechanical elements incorporated within the tracker system. The prompt highlights the significance of the tracker's prompt and precise response to high temperatures. This is essential for maintaining the solar panels' optimal alignment with the sun, hence maximizing the efficiency of

solar energy conversion into electricity.

4. Conclusions

The following is the conclusion of the results of designing a dual-axis solar tracker with temperature, voltage, current, and power measurements, namely:

1. The designed dual-axis solar tracker system has proven to be very effective in optimizing solar energy absorption. With the ability to move the solar panel horizontally and vertically following the sun's movement, the system can significantly increase solar energy reception compared to fixed solar panels.
2. The measurement of temperature, voltage, current, and power in the solar panel installation through NodeMCU ESP8266 has sufficient accuracy. The data generated is reliable and provides valuable information in monitoring and evaluating the performance of solar panel systems.
3. The system can respond to temperature, voltage, current, and power changes in real time. This allows users to monitor and identify changes in conditions that may affect the efficiency and performance of the solar panel installation.
4. In further development, integration with a remote monitoring system and automatic notification setup to report the condition and performance of the solar panel system in real time can be done. The use of intelligent algorithms and artificial intelligence can also be applied to improve the efficiency and reliability of solar tracking.

Credit author statement

Izza Anshory Conceptualization; Methodology; Formal analysis; Writing-original draft. Jamaaluddin Writing-review & editing. A' rasy Fahrudin Writing-review & editing. Ahmad Fudholi Supervision; review, writing-review & editing. Yadi Radiansah Revision. Dalmasius Ganjar Subagio Revision. Yusuf Suryo Utomo Revision. Oo Abdul Rosyid Revision. Kamaruzzaman Sopian Supervision; review, writing-review & editing.

Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Data availability

The authors are unable or have chosen not to specify which data has been used.

Acknowledgment

The authors are grateful to the Directorate of Research and Community Service of Muhammadiyah Sidoarjo University and the Research Center for Energy Conversion and Conservation, National Research and Innovation Agency (BRIN), Indonesia for providing financial assistance for research activities.

References

- [1] A.N. Vargas, G.R. Francisco, M.A.F. Montezuma, L.P. Sampaio, L. Acho, Low-cost dual-axis solar tracker with photovoltaic energy processing for education, *Sustain. Energy Technol. Assessments* 53 (Oct. 2022), <https://doi.org/10.1016/j.seta.2022.102542>.
- [2] E.V. Platonova, A.S. Toropov, A.N. Tulikov, Simulation of energy input to solar panels, in: *Proceedings - 2019 International Ural Conference on Electrical Power Engineering, UralCon, 2019*, pp. 133–137, <https://doi.org/10.1109/URALCON.2019.8877633>, 2019.
- [3] L. de Oliveira-Assis, et al., Optimal energy management system using biogeography based optimization for grid-connected MVDC microgrid with photovoltaic, hydrogen system, electric vehicles and Z-source converters, *Energy Convers. Manag.* 248 (Nov. 2021), <https://doi.org/10.1016/j.enconman.2021.114808>.
- [4] K. Jaiganesh, K. Bharath Simha Reddy, B.K.D. Shobhitha, B. Dhanush Goud, Enhancing the efficiency of rooftop solar photovoltaic panel with simple cleaning mechanism, in: *Materials Today: Proceedings*, Elsevier Ltd, 2021, pp. 411–415, <https://doi.org/10.1016/j.matpr.2021.05.565>.
- [5] M. Mustapha, et al., Mathematical modeling and experimental validation of bifacial photovoltaic–thermal system with mirror reflector, *Case Stud. Therm. Eng.* 43 (2023), <https://doi.org/10.1016/j.csite.2023.102800>.
- [6] C.R. Algarín, A.O. Castro, J.C. Naranjo, Dual-axis solar tracker for using in photovoltaic systems, *Int. J. Renew. Energy Resour.* 7 (1) (2017) 137–145, <https://doi.org/10.20508/ijrer.v7i1.5147.g6973>.
- [7] Y. Yao, Y. Hu, S. Gao, G. Yang, J. Du, A multipurpose dual-axis solar tracker with two tracking strategies, *Renew. Energy* 72 (2014) 88–98, <https://doi.org/10.1016/j.renene.2014.07.002>.
- [8] A. Fudholi, K. Sopian, R&D of photovoltaic thermal (PVT) systems: an overview, *Int. J. Power Electron. Drive Syst.* 9 (2) (2018), <https://doi.org/10.11591/ijpeds.v9.i2.pp803-810>.
- [9] A. Taheri, et al., Improving the performance of a nanofluid-based photovoltaic thermal module utilizing dual-axis solar tracker system: experimental examination and thermodynamic analysis, *Appl. Therm. Eng.* 196 (Sep. 2021), <https://doi.org/10.1016/j.applthermaleng.2021.117178>.
- [10] N.S.B. Rukman, A. Fudholi, I. Taslim, M.A. Indrianti, I.N. Manyoe, Overview on recent photovoltaic module cooling methods: advances PVT systems, *Int. J. Electr. Comput. Eng.* 10 (1) (2020), <https://doi.org/10.11591/ijece.v10i1.pp15-21>.
- [11] M.H. Tan, et al., Optimization study of parasitic energy losses in photovoltaic system with dual-axis solar tracker located at different latitudes, in: *Energy Procedia*, Elsevier Ltd, 2019, pp. 302–308, <https://doi.org/10.1016/j.egypro.2019.01.093>.
- [12] I. Atmane, N. El Mousaoui, K. Kassmi, O. Deblecker, N. Bachiri, Development of an innovative cooker (hot plate) with photovoltaic solar energy, *J. Energy Storage* 36 (Apr. 2021), <https://doi.org/10.1016/j.est.2021.102399>.
- [13] K.M. Tsang, W.L. Chan, A single switch DC/DC converter with galvanic isolation and input current regulation for photovoltaic systems, *Sol. Energy* 119 (Sep. 2015) 203–211, <https://doi.org/10.1016/j.solener.2015.07.005>.

- [14] S. Samara, E. Natsheh, Modeling the output power of heterogeneous photovoltaic panels based on artificial neural networks using low cost microcontrollers the proposed heterogeneous photovoltaic model system offer a proper and, *Heliyon* 4 (2018) 972, <https://doi.org/10.1016/j.heliyon.2018>.
- [15] Institut Teknologi Bandung, Pusat mikroelektronika, institut teknologi bandung. School of electrical engineering and informatics, institute of electrical and electronics engineers. Indonesia section, IEEE solid-state circuits society, in: Indonesia Chapter, IEEE Electron Devices Society. Indonesia Chapter, and Institute of Electrical and Electronics Engineers, 2018 International Symposium on Electronics and Smart Devices (ISESD) : October 23-24, 2018 (Bandung, Indonesia).
- [16] Z. Leonowicz, Institute of electrical and electronics engineers, IEEE electromagnetic compatibility society, IEEE power & energy society, IEEE industry applications society, and industrial and commercial power systems Europe, in: (4th : 2020 : Online), *Conference Proceedings : 2020 IEEE International Conference Environment and Electrical Engineering and 2020 IEEE Industrial and Commercial Power Systems Europe (EEEIC/I & CPS Europe)* : 9-12 June, 2020 (Madrid, Spain).
- [17] A. Kumar, N. Patel, N. Gupta, V. Gupta, Design, analysis and implementation of electronically interfaced photovoltaic system using ARM Cortex-M4 microcontroller, *Comput. Electr. Eng.* 98 (Mar. 2022), <https://doi.org/10.1016/j.compeleceng.2022.107701>.
- [18] M.L. Katche, P. Tsafack, T.D.Y. Armand, E. Tanyi, B. Ducharme, Microcontroller-based charging and monitoring controller for PV based dual battery sets, *J. Energy Storage* 41 (Sep. 2021), 102872, <https://doi.org/10.1016/j.est.2021.102872>.
- [19] A. El Hammoumi, S. Motahhir, A. El Ghzizal, A. Chalh, A. Derouich, A simple and low-cost active dual-axis solar tracker, *Energy Sci. Eng.* 6 (5) (Oct. 2018) 607–620, <https://doi.org/10.1002/ese3.236>.